


COR Vision

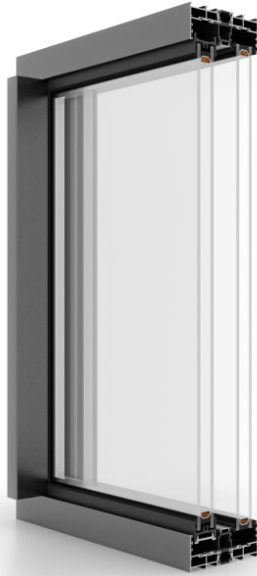

- ✓ profile with a construction depth of 4-9/16" (116 mm)
- ✓ Overall glazing thickness up to 1-3/16" (30 mm)
- ✓ depth of sash: 1-7/16" (37 mm)
- ✓ maximum size for construction – H up to 9' 10" (3000 mm) , L up to 8' 2-3/8" (2500 mm)
- ✓ maximum sash weight: 705 lb / optimally 440 lb
- ✓ we lacquer in the full RAL K7 color palette and, on request, in other colors (use powder code)

2

Guiding Rails

An aluminum sliding door system characterized by modern aesthetics and exceptional thermal parameters. The elegant design of the system is based mainly on the use of very thin profiles, which constitute only 9–14% of the entire structure.

$U_w = 1.4 \text{ W}/(\text{m}^2\text{K})$ * when using the 6esg / 16sws / 6t esg package – $U_g = 1.1 \text{ W}/(\text{m}^2\text{K})$, argon-filled, with an aluminum frame.

*Coefficient calculated for a door with dimensions of 3200 x 2500 mm.

SLIDING DOORS

ALUMINUM

WINDOWS

DOORS